


# B&F Oxygen Pressure Regulators



21025

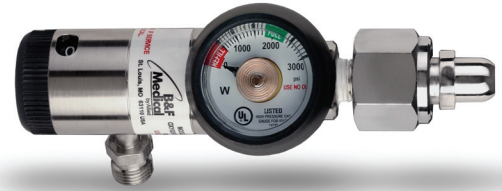

23002



21017

## B&F Brass Oxygen Regulators ... For Quality That Costs Less!

Allied Healthcare offers a wide range of oxygen regulators in the B&F line that will suit most homecare, hospital and emergency situations.

B&F oxygen regulators offer an array of options, such as an easy to read flow rate window and a dial-in click-style flow controller ... making operation convenient for the variety of users. B&F oxygen regulators are available with or without a hose barb outlet ... with or without a DISS outlet ... and with a one-year manufacturer's warranty.

### FEATURES

- Uni-body construction designed to strengthen the regulator and prevent breakage.
- Nickel-plated brass body for safe use in oxygen service.
- Two body designs: Yoke inlet for small cylinders, nut and nipple inlet for large cylinders.
- Compact, 1-1/2" diameter low-profile contents gauge with gauge protector.
- Serrated dial-in flow control knob for ease of flow rate selection.
- Large easy to read flow rate numbers.
- Hose barb or DISS outlet provide secure connection of oxygen supply line to patient.



## SPECIFICATIONS

<b>Supply Pressure:</b>	500 to 2200 psi
<b>Outlet Pressure:</b>	High flow outlets: 40 to 60 psi at 500 to 2200 psi inlet pressure
<b>Flow Capacity:</b>	High flow outlets: 100 lpm minimum single or combined flow with 500 psi inlet pressure Constant flow outlet selections: 0-6 lpm: 0, .125, .25, .5, .75, 1, 1.5, 2, 3, 4, 5, 6 0-8 lpm: 0, .5, 1, 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8 0-15 lpm: 0, .5, 1, 1.5, 2, 3, 4, 5, 6, 8, 10, 15 0-25 lpm: 0, 1, 2, 4, 6, 8, 10, 12, 15, 18, 20, 25
<b>Filter:</b>	50 micron sintered bronze
<b>Safety Relief Pressure:</b>	75-140 psi
<b>Operating Temperature:</b>	32° F to 100° F
<b>Storage Temperature:</b>	-20° F to 120° F
<b>Materials:</b>	Body: Brass Knob: Acetal plastic Outlets: Nickel-plated brass Internal parts: Brass, stainless steel, Viton®, silicon and Teflon®

## ORDERING INFORMATION

### Yoke Pin Indexed CGA 870 Model Regulators

#### Homecare and Hospital:

<b>21020</b>	0-6 lpm, hose barb outlet, with gauge
<b>22020</b>	0-6 lpm, DISS outlet, with gauge
<b>21004</b>	0-8 lpm, hose barb outlet, without gauge
<b>21014</b>	0-8 lpm, hose barb outlet, with gauge
<b>23014</b>	0-8 lpm, DISS outlet, with gauge
<b>21007</b>	0-15 lpm, hose barb outlet, without gauge
<b>21017</b>	0-15 lpm, hose barb outlet, with gauge
<b>23017</b>	0-15 lpm, DISS outlet, with gauge
<b>21030</b>	0-25 lpm, hose barb outlet, with gauge
<b>21031</b>	0-25 lpm, DISS outlet, with gauge

#### EMS:

<b>21012</b>	0-15 lpm, 2 check valves, hose barb outlet, with gauge
<b>24017</b>	0-15 lpm, 1 check valve, hose barb outlet, with gauge
<b>21002</b>	0-25 lpm, 2 check valves, hose barb outlets, without gauge
<b>21025</b>	0-25 lpm, 2 check valves, hose barb outlet, with gauge
<b>21032</b>	0-25 lpm, 1 check valve, hose barb outlet, with gauge

### DISS Fitting CGA 540 Model Regulators

#### Homecare and Hospital:

<b>23020</b>	0-6 lpm, hose barb outlet, with gauge
<b>23002</b>	0-8 lpm, DISS outlet, with gauge
<b>23003</b>	0-15 lpm, DISS outlet, with gauge
<b>EMS:</b>	
<b>23004</b>	0-15 lpm, 1 check valve, hose barb outlet, with gauge
<b>23006</b>	0-15 lpm, 2 check valves, hose barb outlet, with gauge
<b>23025-G</b>	0-25 lpm, 2 check valves, hose barb outlet, with gauge

**Additional models are available. For information about our complete line of oxygen regulators for homecare, hospital and emergency care, contact an Allied Healthcare Products Customer Service Representative.**



**ISO 9001  
CERTIFIED**

Allied Healthcare Products, Inc. • 1720 Sublette Avenue • St. Louis, Missouri 63110  
314/771-2400 • 800/444-3954 • Fax: 314/771-0650 • www.alliedhpi.com  
International offices in Europe, Asia, and South America

U.S.

Toll Free: 800/444-3940  
Fax: 800/477-7701

©Allied Healthcare Products, Inc.

Canada & Mexico

Toll Free: 800/446-0552  
Fax: 800/246-6201

International

Telephone: 314/268-1683  
Fax: 314/771-5183

Form No. 70-00-0005 8/04