


### PRODUCT SPECIFICATION


# **CR2325**

### Lithium Button Cell



### **Dimensions**





Unit:mm(inch)

## **Specifications**

Chemical System: Lithium/Manganese Dioxide

IEC Name:CR 2325Camelion Model:CR2325Average Weight:3.3g

**Dimension**( $\emptyset$  x H): 23.0<sup>-0.3</sup> x2.5<sup>-0.3</sup> mm

0.91<sup>-0.01</sup>x0.10<sup>-0.01</sup>inch

Terminals:FlatNominal Voltage:3.0VoltsCapacity:190mAh

(Rated at  $15k\Omega$  to 2.00V)

**Standard Discharge** 

Current: 0.2mA

Max. Continuous
Discharge Current: 0.5mA

Max. Pulse

Discharge Current:10.0 mAOperating Temperature:-20%-60%Storage Temperature:18%-28%Relative Humidity: $60\pm15\%$ 

Cross Reference: E-CR2325(Energizer)
DL2325(Duracell)
KECR2325(Rayovac)

## **Usage Guide**



Calculator



Remote control



Electronic scales

### **Cautions**

#### Storage

Store the battery in a cool, dry and well-ventilated area.

#### Handling

- Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals. Keep away from metal or other conductive materials.
- (2)Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- (3)When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- (4)In case the battery electrolyte happen to come into mouth,gargle well enough and consult a doctor immediately.


#### Notice:




## **CR2325**

## **Lithium Button Cell**


## **Discharge Characteristics**

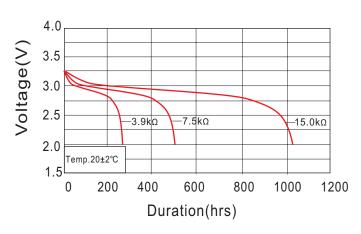


### **Temperature Characteristics**

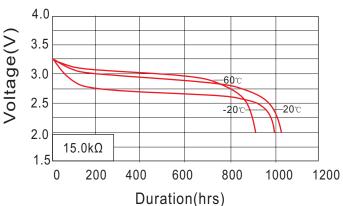

## **Load-capacity Characteristic**

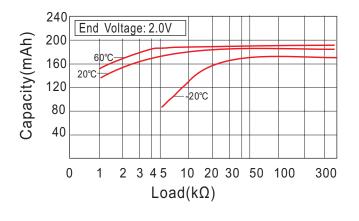

### **Operating Voltage**

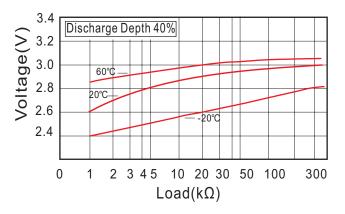

### Pulse Discharge Characteristic Storage Characteristic

